


DOME GX4MP

4MP Clinical Color Display

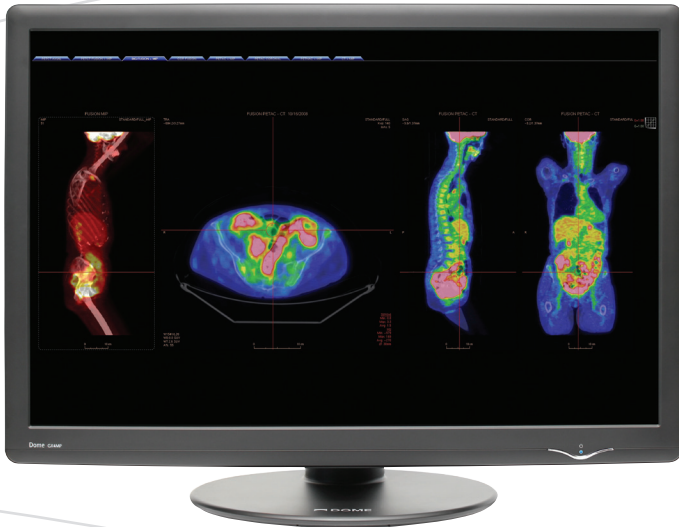

The **Dome GX4MP** is a 30-inch widescreen display offering multi-modality viewing in both color and grayscale. The Dome GX4MP offers a unique viewing configuration as two 2 megapixels displays or one 4 megapixel display.

- Widescreen 4MP color display
- CXtra™-controlled DICOM for life
- Flexible, lightweight, low-power design
- Quality image viewing without reflective glass



RightLight™: RightLight™ monitoring provides proven backlight stabilization and automatic DICOM compliance. RightLight™ is constantly monitoring your system to provide displays that are always ready for diagnostic viewing.

ClearView: The American College of Radiology recommends that "Protective shields on LCDs add to reflections and should not be used if possible." Reflective glass can also reflect backwards onto the display blurring the diagnostic images. Some companies continue to believe adding reflective glass is a feature. We agree with the ACR, image quality comes first, so we don't put reflective glass on our Dome GX4MP display.

DICOM Assured: Dome GX4MP displays are fully factory characterized using a NIST-traceable photometer, which provides high quality characterization of diagnostic displays. The characterization data is stored in the panel and allows the display to remain in perfect DICOM calibration for the life of the display. With CXtra software, you simply open the box, plug it in, and you're ready.

Fanless: Dome GX4MP displays use intelligent engineering for sleek, low-power, fanless designs. No mechanical fans to fail or draw in dust which can cause electronics to fail prematurely. Lower power, lower heat, lower cost of ownership thanks to Dome's unmatched engineering excellence.

DOME GX4MP

4MP Clinical Color Display



LCD CHARACTERISTICS

Technology	TFT AMLCD Dual Domain IPS, 3 subpixels per pixel
Screen Size	29.8" (756mm)
Display Resolution	2560 x 1600 Landscape
Pixel Pitch	251µm, 101 DPI
Viewing Angle	178° horizontal and vertical
Response Time	12 ms typical

OPTICAL CHARACTERISTICS

Brightness	370 cd/m ² typical
Default Calibrated	250 cd/m ²
Contrast Ratio	1,000:1 typical
DICOM LUT	1786 shades of gray
DICOM Characterization	LCD panels individually factory characterized with a NIST-traceable photometer. Characteristic data is stored in the display and remains available throughout the product life.
DICOM Calibration	DICOM calibration performed by Dome CXtra™ using the RightLight™ internal photometer and automatically maintained for the life of the display.
DICOM Conformance Testing	DICOM conformance maintained by RightLight™ internal photometer. Independent conformance testing using Dome CXtra™ with an external photometer.

PANEL CONNECTIVITY

Video Input	Dual Link DVI-D
Pixel Data Sizes	8-bit, 16-bit, and 24-bit per pixel color
VGA	640 x 480 to 1280 x 800
Compatibility	
USB Interface	Built-in USB 2.0 HUB on monitor

PHYSICAL CHARACTERISTICS

Display Size without stand (H x W x D)	28" x 18.6" x 2.8" (713mm x 473mm x 72mm)
Weight without stand	24 lbs (10.9 kg)
Weight with stand	30 lbs (13.6 kg)
Mounting Options	100 x 100 mm VESA mounting standard. Desktop stand includes height, pivot, swivel, and tilt adjustment.
Power Input	100 to 240 VAC 50-60 Hz
Power Consumption	110 Watts typical, 130 Watts max
Operating Range	10 to 35 degrees C













CERTIFICATIONS

Medical	—
Safety & EMI	UL, cUL, FCC, CE, CCC, VCCI
Environmental	RoHS, WEEE, REACH

SERVICE AND SUPPORT

Warranty	3-year standard warranty
Backlight	3-year standard warranty

Specifications may vary based on specific customized solution requirements.

- 4MP color display 
- RightLight™ monitoring for DICOM conformance 
- Clear images without reflective glass 
- Factory characterized for life 
- High-precise DICOM LUT 
- Widescreen for two displays in one 
- Green by design 
- Low-power, fanless design 
- Feather-light, small footprint design 
- World-class warranty 
- Industry-leading backlight warranty 
- High-speed, dual-link DVI 



www.ndssi.com

Corporate Headquarters

5750 Hellyer Avenue
San Jose, CA 95138 (USA)
Tel: 408 776 0085
Toll Free: 866 637 5237
Email: info@ndssi.com

Europe

Nijverheidscentrum 28
2761 JP Zevenhuizen (ZH)
The Netherlands
Tel: + 31 180 63 43 56
Email: info-emea@ndssi.com

Asia Pacific

Takanawa Kaneo Bldg., 6F
3-25-22 Takanawa
Minato-ku Tokyo, Japan, 108-0074
Tel: + 81 3 5475 1835
Email: info@ndssi.jp