


# DOME S3c


## Premium 3MP Diagnostic Color Display



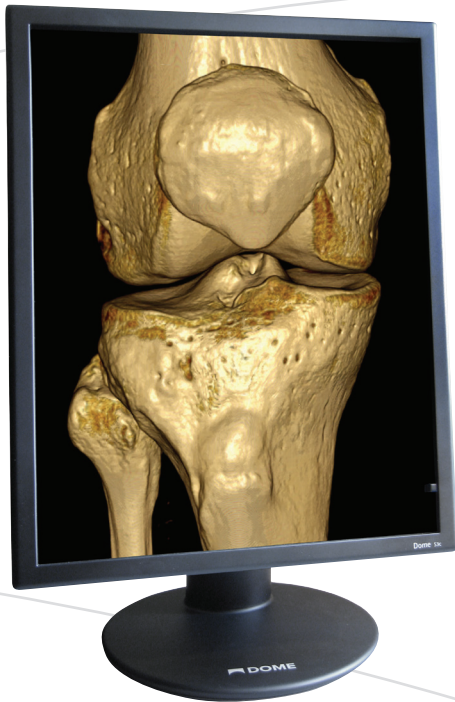

The **Dome S3c** display is the all-in-one diagnostic display deployable throughout the hospital enterprise.


- High-bright 3MP color display
- Suitable for grayscale and color images
- RightCheck sensor for remote conformance testing
- Quality image viewing without compromise




 **RightCheck:** Based on Dome's patent pending sensor technology for optimum remote testing and validation. Our unique technology gives us precise measurements for quick and confident confirmation of DICOM conformance.

 **30-Bit Color:** Rich, 30-bit color allows over a billion different shades to be displayed for viewing even the most subtle hues of color diagnostic images. Brilliant images from blazing speed.

 **RightLight™:** RightLight™ monitoring provides proven backlight stabilization and automatic DICOM compliance. RightLight™ is constantly monitoring your system to provide displays that are always ready for diagnostic viewing.

 **DICOM Always:** Dome S3c displays are fully factory characterized using a NIST-traceable photometer, which provides high quality characterization of diagnostic displays. The characterization data is stored in the panel and allows the display to remain in perfect DICOM calibration for the life of the display. No additional field calibration is ever necessary. You simply open the box, plug it in, and you're ready.

 **Fanless:** Dome S3c displays use intelligent engineering for sleek, low-power, fanless designs. No mechanical fans to fail or draw in dust which can cause electronics to fail prematurely. Lower power, lower heat, lower cost of ownership thanks to Dome's unmatched engineering excellence.

# DOME S3c

## Premium 3MP Diagnostic Color Display



### LCD CHARACTERISTICS

Technology	TFT AMLCD Dual Domain IPS, 3 subpixels per pixel
Screen Size	21.3" (541mm)
Display Resolution	1536 x 2048 Portrait 2048 x 1536 Landscape
Pixel Pitch	212µm, 120 DPI
Viewing Angle	170° horizontal and vertical
Response Time	24 ms typical

### OPTICAL CHARACTERISTICS

Brightness	800 cd/m <sup>2</sup> typical
Default Calibrated	500 cd/m <sup>2</sup>
Contrast Ratio	750:1 typical
DICOM LUT	2041 shades of gray
DICOM Characterization	LCD panels individually factory characterized with a NIST-traceable photometer. Characteristic data is stored in the display and remains available throughout the product life.
DICOM Calibration	DICOM calibration performed by Dome CXtra™ using the RightLight™ internal photometer and automatically maintained for the life of the display.
DICOM Conformance Testing	DICOM conformance maintained by RightLight™ internal photometer. Automated conformance testing through RightCheck front sensor.

### PANEL CONNECTIVITY

Video Input	DisplayPort 1.1 and Dual Link DVI-D
Pixel Data Sizes	8-bit, 16-bit, 24-bit, and 30-bit per pixel color
VGA Compatibility	640 x 480 to 1280 x 1024
USB Interface	USB B upstream port

### PHYSICAL CHARACTERISTICS

Display Size without stand (H x W x D)	18.7" x 14.3" x 3.9" (475mm x 363mm x 99mm)
Weight without stand	14 lbs (6.4 kg)
Weight with stand	21 lbs (9.3 kg)
Mounting Options	100 x 100 mm VESA mounting standard. Desktop stand includes height, pivot, swivel, and tilt adjustment.
Power Input	100 to 240 VAC 50-60 Hz
Power Consumption	96 Watts typical, 108 Watts max
Operating Range	10 to 35 degrees C


### CERTIFICATIONS

Medical	FDA 510(k) Registration #2954921 and #1226517
Safety & EMI	CSAus, EN60601-1, EN60601-1-2, FCC, CE, CCC, TUV-GM, VCCI, KCC
Environmental	RoHS, WEEE, REACH

### SERVICE AND SUPPORT

Warranty	5-year standard warranty
Backlight Warranty	5-year standard warranty

Specifications may vary based on specific customized solution requirements.

- 3MP color display 
- RightLight™ monitoring for DICOM conformance 
- Clear images without reflective glass 
- Patent pending RightCheck sensor 
- Factory characterized for life 
- High-precise DICOM LUT 
- Full 30-bit color support 
- Energy efficient and Green by design 
- Low-power, fanless design 
- Feather-light, small footprint design 
- World-class warranty 
- Industry-leading backlight warranty 
- Full bandwidth DisplayPort support 
- High-speed, dual-link DVI 



www.ndssi.com

### Corporate Headquarters

5750 Hellyer Avenue  
San Jose, CA 95138 (USA)  
Tel: 408 776 0085  
Toll Free: 866 637 5237  
Email: info@ndssi.com

### Europe

Nijverheidscentrum 28  
2761 JP Zevenhuizen (ZH)  
The Netherlands  
Tel: + 31 180 63 43 56  
Email: info-emea@ndssi.com

### Asia Pacific

Takanawa Kaneo Bldg., 6F  
3-25-22 Takanawa  
Minato-ku Tokyo, Japan, 108-0074  
Tel: + 81 3 5475 1835  
Email: info@ndssi.jp